



- Energy Storage Capacity: 3.4-5 mJ

Specifications

| MIX 8 G0 | | MIX 52 G2 | | MIX 52 G1 | | MIX 52 G0 | | RATED CURRENT AMPS DC | DCR mOHM REF | # COILS |
|---------------|---------------------|---------------|---------------------|---------------|---------------------|---------------|---------------------|-----------------------------|--------------------|---------|
| SCHOTT P/N | L, μ H 0 ADC | SCHOTT P/N | L, μ H 0 ADC | SCHOTT P/N | L, μ H 0 ADC | SCHOTT P/N | L, μ H 0 ADC | | | |
| 32521 | 1.0 | 32539 | 1.02 | 32557 | 1.35 | 32575 | 2.12 | 92.5 | 0.43 | 3 |
| 32522 | 4.44 | 32540 | 1.47 | 32558 | 1.94 | 32576 | 3.06 | 75.8 | 0.61 | 3 |
| 32523 | 1.97 | 32541 | 2.0 | 32559 | 2.64 | 32577 | 4.16 | 66.9 | 7.75 | 2 |
| 32524 | 2.57 | 32542 | 2.61 | 32560 | 3.44 | 32578 | 5.43 | 58.6 | 0.95 | 2 |
| 32525 | 3.25 | 32543 | 3.3 | 32561 | 4.36 | 32579 | 6.88 | 51.6 | 1.2 | 2 |
| 32526 | 4.01 | 32544 | 4.08 | 32562 | 5.38 | 32580 | 8.49 | 45.8 | 1.5 | 2 |
| 32527 | 4.85 | 32545 | 4.94 | 32563 | 6.51 | 32581 | 10.3 | 41.1 | 1.8 | 2 |
| 32528 | 5.78 | 32546 | 5.88 | 32564 | 7.75 | 32582 | 12.2 | 37.2 | 2.2 | 2 |
| 32529 | 7.86 | 32547 | 8.0 | 32565 | 10.5 | 32583 | 16.6 | 33.8 | 2.6 | 1 |
| 32530 | 9.03 | 32548 | 9.18 | 32566 | 12.1 | 32584 | 19.1 | 31.7 | 2.9 | 1 |
| 32531 | 10.3 | 32549 | 10.4 | 32567 | 13.8 | 32585 | 21.7 | 29.8 | 3.3 | 1 |
| 32532 | 13.0 | 32550 | 13.2 | 32568 | 13.2 | 32586 | 27.5 | 26.2 | 4.2 | 1 |
| 32533 | 16.0 | 32551 | 16.3 | 32569 | 21.5 | 32587 | 34.0 | 23.3 | 5.2 | 1 |
| 32534 | 19.4 | 32552 | 19.7 | 32570 | 26.0 | 32588 | 41.1 | 20.9 | 6.5 | 1 |
| 32535 | 23.1 | 32553 | 23.5 | 32571 | 31.0 | 32589 | 48.9 | 18.9 | 7.8 | 1 |
| 32536 | 27.1 | 32554 | 27.6 | 32572 | 36.4 | 32590 | 57.4 | 17.2 | 9.4 | 1 |
| 32537 | 31.5 | 32555 | 32.0 | 32573 | 42.2 | 32591 | 66.5 | 15.8 | 11.2 | 1 |
| 32538 | 36.1 | 32556 | 36.7 | 32574 | 48.4 | 32592 | 76.4 | 14.5 | 13.1 | 1 |



Parts availability subject to Schott manufacturing schedules and leadtimes. Not all parts available from stock. Please contact us for more details and availability. The Adobe Acrobat Reader is required to view these linked documents.

Electrical Specifications Test Criteria

1. Inductance tolerances at zero DC current are $\pm 10\%$ for G2 designs, $\pm 12\%$ for G0 and G1 designs.
2. Inductances shown are at zero DC current. See inductance vs. bias curves for inductances with DC current.
3. Temperature rise is approximately 60°C at rated DC current.
4. Multiple coil units are rated with all coils parallel connected.
5. Parts are 100% tested for inductance and hipot (1000 Vrms).

All data is believed to be accurate at time of printing. Schott Corporation reserves the right to make changes without notification. "Schott" is a trade name of Schott Corporation. All other trademarks and trade names are the property of their respective holder.

Standard Configuration

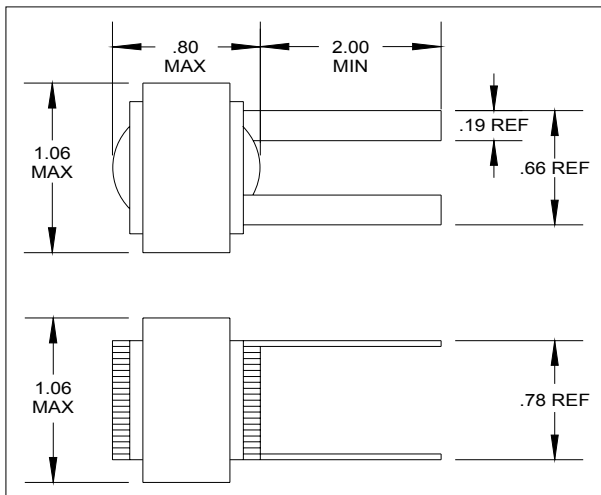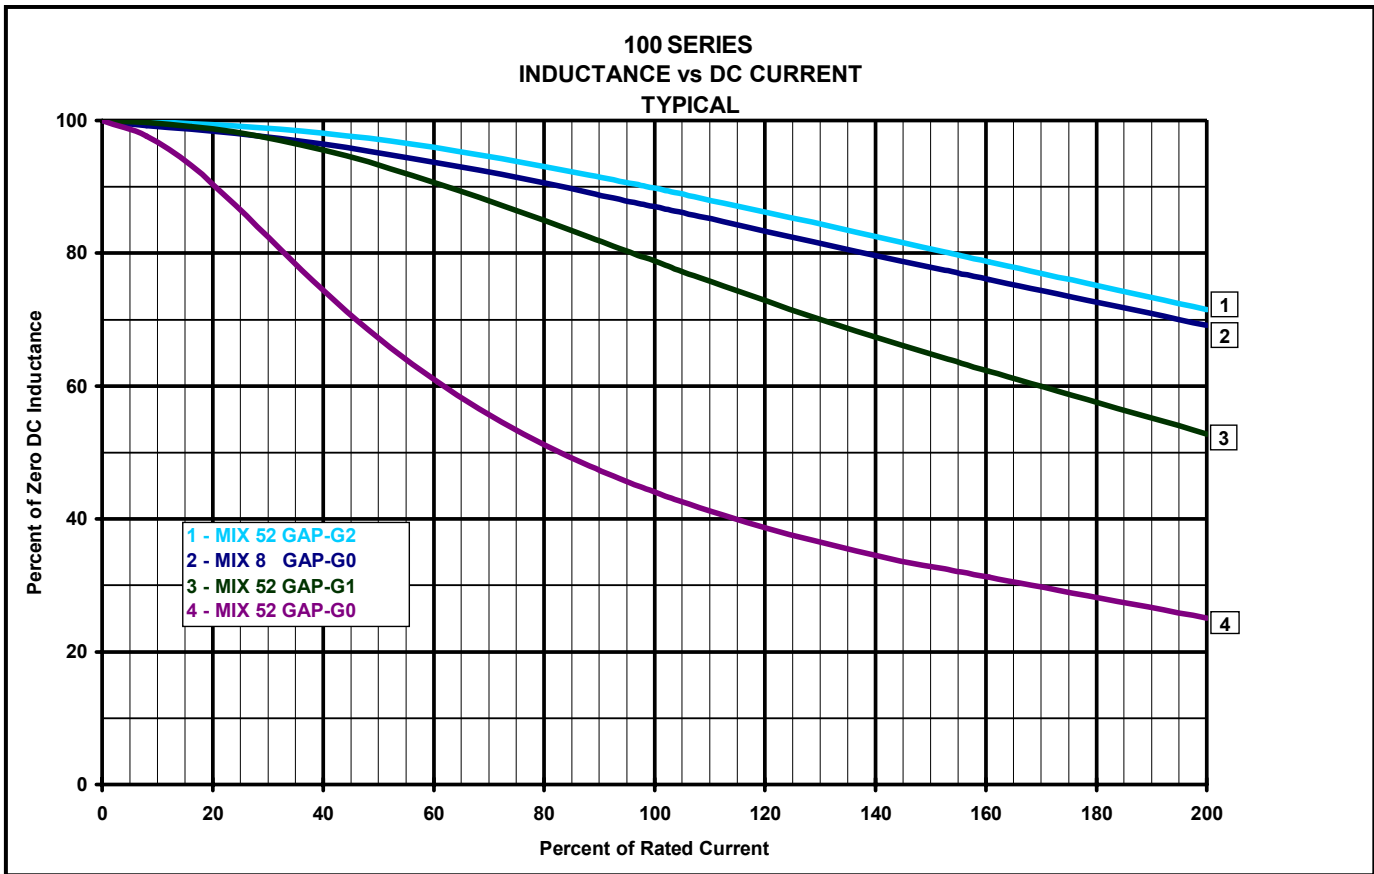

All statements and technical information contained herein are believed to be accurate, but the accuracy and completeness thereof is not guaranteed. If any product is found to be defective, Schott Corporation's (Seller) only obligation shall be to replace such quantity of the product proved to be defective. User shall determine the suitability of the product for the intended use, and user assumes all risk and liability whatsoever in connection herewith. Seller shall not be liable for any direct, consequential, or incidental loss or damage. Conditions not specifically stated herein shall be governed by established trade customs. Schott Corporation reserves the right to make changes without notification. "Schott" is a trade name of Schott Corporation. All other trademarks and trade names are the property of their respective holder.



Schott Corporation
1000 Parkers Lake Road
Wayzata, Minnesota 55391
U.S.A.

Tel: + (952) 475-1173

Fax: + (952) 475-1786

Email: salesd@schottcorp.com

Web: <http://www.schottcorp.com>